


Description

A non-combustible fiber cement board are manufactured by the Hatcheck process and cured by high pressure steam autoclave. ACFA Wood Texture boards have wood grain patterns embossed on the top surface of the board. These boards can be used in Internal wall lining and External Façade and Soffit ceiling applications. These boards comes unpainted and can be finished as per the project requirement.

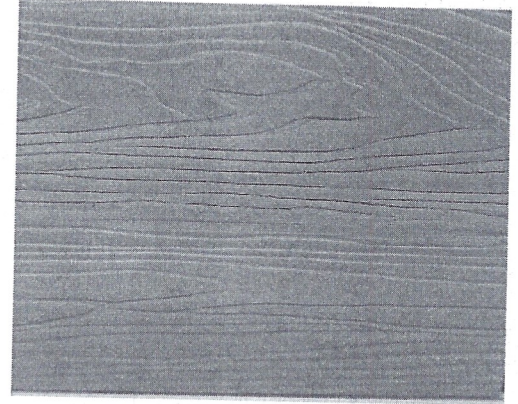

Advantages

- ✓ Due to its unique formulation, ACFA Wood Texture boards resists termite and moisture.
- ✓ They do not rot and deteriorates and provide long lasting strength.
- ✓ They also offers excellent weather resistance and are low maintenance product.

Specification Complied to ASTM C1186

Characteristics	UOM	Requirements	Pass/Fail
Length	mm	3000	Pass
Width	mm	200	Pass
Thickness	mm	8	Pass
Thickness Variation Between Sheets	mm	±0.5	Pass
Straightness of Edges	mm/meter	≤ 2.6	Pass
Squareness	mm/meter	≤ 2.6	Pass
Wet Flexural Strength	Mpa	≥ 7	Pass
Equilibrium Flexural Strength	Mpa	≥ 10	Pass
Wet Flexural strength % of Equilibrium strength	%	≥ 50	Pass
Density	Kg/m ³	As Reported	As Reported
Moisture	%	As Reported	As Reported
Water Absorption	%	As Reported	As Reported

Product Data

- ✓ Width – 200mm
- ✓ Length – 3000m
- ✓ Edge – Square

Manufacturer: 4724 — Sudair City for Business and Industry — Unit number: 2
P.O. Box: 7659— Tumair 15336, Kingdom of Saudi Arabia

Document # ACFA122024 REV # 00

All data as per inhouse test or simulated internally.

